BATTERY DATA SHEET





VRLA | GENERAL PURPOSE APPLICATION REF BP12-7.0 VOLTAGE - v BP12-7.0(12V7.0AH) ance-free Sealed Lead-acid Battery CAPACITY - Ah (20Hr) **7.0**Ah CONSTANT VOLTAGE CHARGE lainter 13.5-13.8 14.4-15.0 use use 6.7_{Ah} CAPACITY - Ah (10Hr)

www.bs-battery.com

TECHNOLOGY

- AGM technology (Absorbed Acid)
- Sealed valve-regulated
- Spill proof / leak proof •
- Lead calcium Grids for superior life •
- · Design life: 5 years at 20°C ambient temperature


FEATURES


- Maintenance free, no water adding required •
- Deep discharge protection
- No corrosion
- Multi-positional fitment
- Low gassing
- Rugged impact resistance ABS case
- Low self-discharge rate

f 💿 🖸 in

Very good cycling and stationary performance









TERMINALS (mm)

T2



UPGRADE FOR

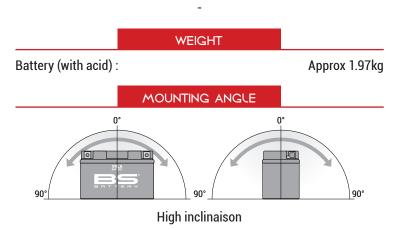

BS BATTERY